

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 October 2005 (06.10.2005)

PCT

(10) International Publication Number
WO 2005/093198 A3

(51) International Patent Classification⁷: E06B 9/323, 9/64

(21) International Application Number:
PCT/EP2005/003753

(22) International Filing Date: 17 March 2005 (17.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1025790 22 March 2004 (22.03.2004) NL
1028053 18 January 2005 (18.01.2005) NL

(71) Applicant and

(72) Inventor: ROETGERING, Grit [NL/NL]; Goorseweg
27, NL-7468 SH Enter (NL).

(74) Agent: SHUMANN, Bernard, Herman, Johan; Schu-
mann Patent Consultancy B.V., Kerkedennen 43, NL-7621
EB Borne (NL).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,

CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU,
ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report

(88) Date of publication of the international search report:
9 March 2006

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: PROFILED BAR WITH A RAISING MECHANISM FOR A WINDOW OR DOOR COVERING

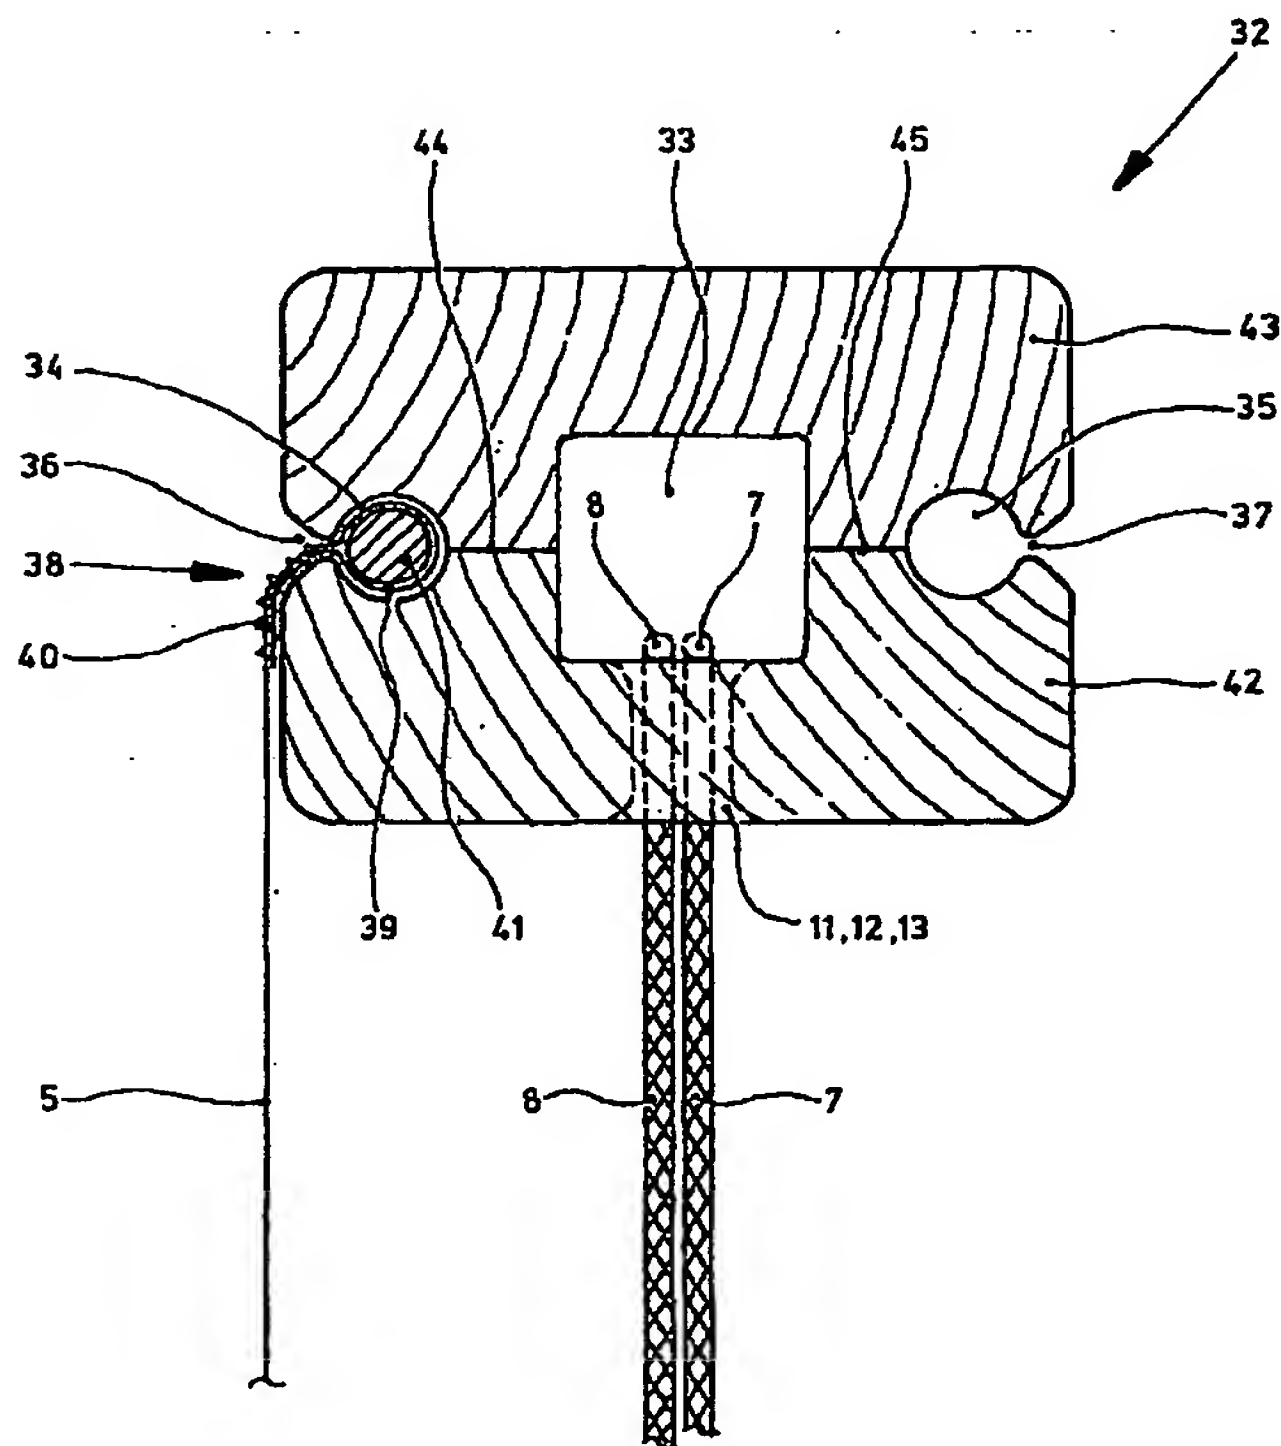

(57) Abstract: A bar intended for fixing to the
topside of a window or door comprises: a first
cavity for accommodating a raising mechanism for
raising cords for a covering for the window, which
internal cavity is accessible from outside via holes
in the bar for passage of a control cord and at least
two cords which are connected for driving to the
underside of the covering; a second cavity which
extends in the longitudinal direction and which
debouches via a constriction onto the outside of
the bar, and serves to receive the upper edge of
the covering which fits into the second cavity but
is too wide to pass through the constriction; two
profiles which together bound the first cavity, in at
least one of which profiles said holes are present.

WO 2005/093198 A3